

# TRANSMAX EC Gas Monitor

## Loop-Powered Gas Monitor for Toxic Applications

- \* High quality gas detection for general purpose areas
- \* Non-polarized loop powered interface eliminates wiring errors
- \* Graphic display shows values, units, trend graph, alarm levels
- \* Three flashing Alarm LEDs with Programmable Alarm Levels
- \* Real time clock tags alarm and calibration events
- \* Supports both local and remote sensors for easy installation
- \* Non-intrusive, prompted calibration with programmable cal gas
- \* Power-up and post-calibration delays eliminate false alarms
- \* Security settings to lock critical parameters
- \* Fault supervision circuitry detects failed sensor & transmits warning
- \* For combustible applications, see the TRANSMAX II gas monitor



The TRANSMAX EC single channel gas monitor for toxic or oxygen deficiency applications delivers the latest in loop-powered gas detection technology, reliability and ease of use.

### Wide Variety of Available Sensors

The TRANSMAX EC supports all GDS Corp toxic sensors, including oxygen, hydrogen sulfide, chlorine, carbon monoxide and more (see chart on back). Disposable DELRIN sensor heads with integrated sensors make maintenance easy. Fault detection circuitry constantly monitors sensor inputs for missing or faulty sensors. The TRANSMAX EC maintains a record of sensor calibration data and calculates and displays an estimate of sensor life remaining at the conclusion of each calibration cycle.

### Advanced User Interface

The highly visible graphic LCD display shows the latest reading in large (0.6") digits, engineering units and programmable tag name. Flashing LEDs indicate

Hydrogen Sulfide  
Oxygen Deficiency  
Carbon Monoxide  
Hydrogen Fluoride  
Ammonia  
Chlorine

... And More

Over 20 different sensor options for General Purpose applications

alarm status, a unique feature among loop-powered devices. Activating the NEXT key switches to a trend screen that graphically displays alarm levels and a record of the most recent 30 minute trend. A built-in, prompted calibration procedure simplifies periodic maintenance needs.

An internal real-time clock and event log time-stamp up to 300 alarm events for later review. Taking advantage of the high-resolution graphic display, an easy-to-use menu-driven operator interface using magnetic keys eliminates all analog potentiometers and allows complete setup and calibration without opening the enclosure.

### Enhanced Security

Three operational levels of security allow the GASMAX EC to be fully field configurable, partially restricted or completely restricted by way of user ID and access code.

### Designed for General Purpose Areas

The TRANSMAX EC is designed specifically for general purpose areas where highly reliable gas detection is required. The enclosure is rated NEMA 4X and IP66/67 for outdoor use. A splash guard is available for the sensor if directed water spray is expected.

**GDS**  
**Corp**

Gas and Flame Detection

2513 Hwy 646

Santa Fe, Texas 77510



409-927-2980 • 409-927-4180 (fax)

www.gdscorp.com • info@gdscorp.com

TRANSMAX EC SPECIFICATIONS	
<b>Power Input</b>	10-30VDC at less than 0.75 watts in 2-wire 4-20mA configuration
<b>Display</b>	64 x 128 pixel LCD with 30-minute trend, bargraph and engineering units display.
<b>Input</b>	Accepts microamp-level signals from local or remote GDS Corp toxic or oxygen deficiency sensors
<b>Calibration Range</b>	Zero = +/- 15% of range with 0.1% resolution Span = Gain adjustment of 0.5 to 2.0 with 0.1% resolution
<b>Accuracy</b>	+/- 5% of full scale range (typical)
<b>Standard Output</b>	Standard 2-wire 4-20mA current sink output. Max loop R is 600 ohms with nominal 24VDC power supply.
<b>Temp</b>	-25°C to +60°C (see sensor limitations)
<b>Housing</b>	Polycarbonate housing with transparent cover. Stainless steel screws. Rated IP66/IP67
<b>Dimensions</b>	Width 4.87" (124mm), Height 6" (152mm), Depth 3.75" (95mm) Shipping weight 3.5 pounds (1.6 kg)
<b>Warranty</b>	Two years on electronics and one year on sensors from date of purchase

TRANSMAX EC Order Guide	
TMEC A - B - C	
<b>"A"</b>	SENSOR HEAD <sup>1,2,4,6</sup> 1 = Delrin Sensor Head with Integrated Sensor 2 = Delrin Sensor Head with Integrated Sensor & Splash Guard
<b>"B"</b>	SENSOR TYPE (see chart)
<b>"C"</b>	DETECTION RANGE <sup>1</sup> 1 = 0 - 1 2 = 0 - 5 3 = 0 - 10 4 = 0 - 25 5 = 0 - 50 6 = 0 - 100 7 = 0 - 500 8 = 0 - 1000 9 = Custom (contact factory)

SENSOR TYPES					
<b>10</b>	Oxygen (0-25%)	-30 to +55C	<b>21</b>	Ozone (0-1)	-20 to +40C
<b>11</b>	Carbon Monoxide (0-300)	-30 to +50C	<b>22</b>	Ethylene Oxide (0-20)	-20 to +50C
<b>12</b>	Chlorine (0-5)	-20 to +50C	<b>23</b>	Arsine (0-1)	-20 to +40C
<b>13</b>	Chlorine Dioxide (0-1)	-20 to +40C	<b>24</b>	Silane (0-50)	-20 to +40C
<b>14</b>	Hydrogen (0-2000)	-20 to +50C	<b>25</b>	Fluorine (0-1)	-10 to +40C
<b>15</b>	Hydrogen Sulfide (0-100)	-30 to +50C	<b>26</b>	Phosgene (0-1)	-20 to +40C
<b>16</b>	Hydrogen Cyanide (0-50)	-20 to +50C	<b>27</b>	Hydrazine (0-1)	-10 to +40C
<b>17</b>	Hydrogen Chloride (0-30)	-20 to +50C	<b>28</b>	Nitric Oxide (0-50)	-20 to +50C
<b>18</b>	Hydrogen Fluoride (0-10)	-20 to +50C	<b>29</b>	Nitrogen Dioxide (0-100)	-20 to +50C
<b>19</b>	Sulfur Dioxide (0-25)	-30 to +50C	<b>30</b>	Mercaptan TBM (0-15)	-10 to +40C
<b>20</b>	Ammonia (0-100)	-20 to +40C	<b>31</b>	Tetrahydrothiophene (0-100)	-10 to +40C

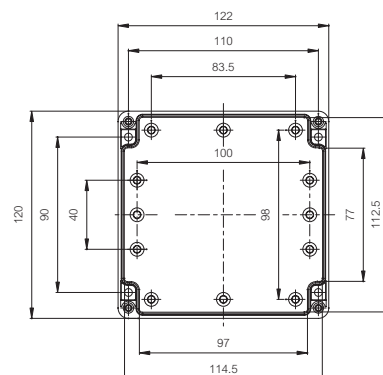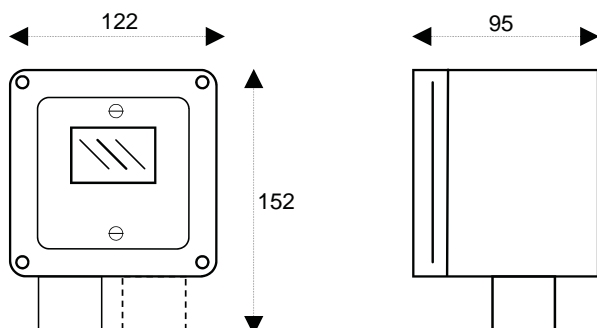

2513 Hwy 646  
 Santa Fe, Texas 77510  
 409-927-2980 • 409-927-4180 (fax)  
 www.gdscorp.com • info@gdscorp.com

Toxic & Combustible Gas Detection • Controllers • Process Monitors • Calibration Supplies

NOTES
Note 1: Standard ranges shown; contact factory for additional ranges